



G5.CT Charger Tester Series

The G5.CT series are unidirectional regenerative sinks. It was developed specifically for testing chargers and is suitable for use in laboratories and on test benches. The modular and finely graded G5.CT series is characterized by highly dynamic response times and a wide current-voltage range with an auto-ranging factor 3. The G5.CT series can simulate the electrical charging characteristics of a modern battery pack. This includes active voltage output and real-time simulation of an internal resistance.

Device Types

Voltage V	Power kW	Current A	Height U	Order Code
*0...80	9	-338...7	4	G5.CT.9.80.338
*0...80	18	-676...14	4	G5.CT.18.80.676
*0...80	27	-1014...20	7	G5.CT.27.80.1014
*0...80	36	-1352...27	7	G5.CT.36.80.1352
*0...80	45	-1690...34	10	G5.CT.45.80.1690
*0...80	54	-2028...41	10	G5.CT.54.80.2028
0...160	18	-338...7	4	G5.CT.18.160.338
0...160	36	-676...14	7	G5.CT.36.160.676
0...160	54	-1014...20	10	G5.CT.54.160.1014
0...240	27	-338...7	7	G5.CT.27.240.338
0...240	54	-676...14	10	G5.CT.54.240.676
0...320	36	-338...7	7	G5.CT.36.320.338
0...500	9	-54...1	4	G5.CT.9.500.54
0...500	18	-108...2	4	G5.CT.18.500.108
0...500	27	-162...3	7	G5.CT.27.500.162
0...500	36	-216...4	7	G5.CT.36.500.216
0...500	45	-270...5	10	G5.CT.45.500.270
0...500	54	-324...6	10	G5.CT.54.500.324
0...1000	18	-54...1	4	G5.CT.18.1000.54
0...1000	36	-108...2	7	G5.CT.36.1000.108
0...1000	54	-162...3	10	G5.CT.54.1000.162
0...1500	27	-54...1	7	G5.CT.27.1500.54
0...1500	54	-108...2	10	G5.CT.54.1500.108

*also as 60 V SELV version for single or parallel operation available, order code example: G5.CT.9.**60**.338

Modular and Easy Scalable Systems

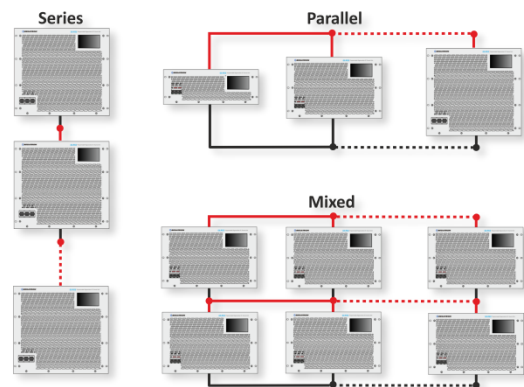


Figure 1: Modular concept for easy power and voltage increase by parallel, series, and mixed operation. The parallel configuration allows even an operation of different power levels, e.g., 18, 36, and 54 kW modules, in one system.

The output of an individual DC electronic load is in the range from 0...9 kW to 0...2000+ kW, up to 3000 VDC. The advantageous modularity of REGATRON DC electronic load solutions allows the system to be easily adapted to ever changing test requirements. It is possible to reconfigure between parallel, series, and mixed operation. Moreover the system can be

expanded with additional power supply units or to be split into smaller units.

Whether for single devices or powerful multi-device mutli-unit systems, REGATRON also offers turnkey cabinet solutions or project specific system integration according to customer specifications.

Therefore, the purchase of a REGATRON DC electronic load is a solid investment for the future.

Charger Testing Features

The G5.CT series simulates the electrical charging characteristics of a modern battery pack. This includes a real-time simulation of the internal resistance (Ri). In addition, the active voltage output of the G5 Charger Tester series is a key feature for the simulation of the charging process. Also important, the characteristics of the output filter stage are optimized for this application. Therefore, the G5.CT series is the ideal, versatile charger tester!

Features such as adjustable controller settings and the integrated powerful 8-channel digital scope assist the user to quickly and easily achieve optimal system behavior for a special application requirement. The G5.CT series also offers the possibility to store, edit and recall any device configuration on board the DC electronic load.

General Dynamic Data

rise/fall time	sink current 0...90%	35...70 μ s
set-value step		
response time	CV, recovery within	
load step	0.5% set value	50...290 μ s

Accuracy

The G5.CT series has an exceptional voltage accuracy of 0.01...0.02% FS. The current accuracy is in the range of 0.025...0.085% FS depending on the model. There is even an additional high-resolution current measurement range from -10 to 10% FS with an accuracy of better than 0.005% FS.

Control Modes

- CV constant voltage
- CC constant current
- CP constant power
- CR constant resistance
- Ri internal resistance simulation

Interfaces

Ethernet and USB

To connect with:

- G5.Control the operating and maintenance software
- API .NET programming, e.g., by LabView, Python, Matlab, or REST interface

I/O port

Interface featuring analog and digital signals used for set and actual values or operating states.

Grid Connection

The wide-band AC input accepts all common AC grid systems and has an active power factor correction.

AC Grid	380...480 VAC \pm 10% at 50/60 Hz
PF	0.99
Efficiency	91...96%, depending on model

Options

Software and Control

Time-Based Function Generator

The TFE time-based function generator allows programming either through G5.Control operating software, HMI touch display, or CANmp interface.

- Time-dependent functions $U = f(t)$, $I = f(t)$, $P = f(t)$: sine, triangle, or square as well as user-defined data points. Import and export through csv files supported
- Ramp function for amplitude and offset changes
- Small signal modulation up to 10 kHz

CAN Interface

The CAN multi-protocol (CANmp) interface has a 1 kHz data rate, a 16-bit resolution and is adaptable to any proprietary CAN bus. In addition, it supports dbc file handling.

HMI / RCU

The HMI built into the front panel allows comprehensive and convenient operation of the DC electronic load via touch display.

With the remote control unit (RCU) it is possible to control the device or system from a distant location in the same manner as with the HMI.



Figure 2: Intuitive control by HMI touch display. Everything you need at a glance.

User Safety

- Integrated safety relay (ISR) for increased emergency stop reliability supporting performance level PL c / PL e according to EN ISO 13849
- Discharge of AC filter (XCD), mandatory for mobile use of the device. XCD ensures a discharge time of the AC filter <1 s required by EN 62477-1
- Various terminal protection covers

The different protective covers are designed for integration into 19" rack systems or for use as a tabletop device. The cover for cabinet integration provides protection against accidental contact, whereas the cover for the tabletop version requires a touchproof protection in accordance with standard EN 62477-1.

Voltage V	Power kW	DC-cover acc. contact	DC-cover touchproof	AC-cover touchproof	Tabletop use allowed	Order Code
60...160	≤18	●	○		✓	G5.PAC.DCAC.1
60...320	≥27	●	—	—	—	
500...1000	≤18		●	○	✓	G5.PAC.AC.1
500...1500	≥27		●	○	✓	G5.PAC.AC.2

- included
- optional, mandatory for tabletop use

Rack-Integrated System Solutions

- Mobile rack solutions up to IP54
- Insulation monitoring: remote activation of the insulation measurement, actual insulation value and warning/error status are provided by CANmp interface or by optional HMI
- Easy reconfiguration between parallel, series, and mixed operation



Figure 3: REGATRON's rack-integrated turn-key system solutions, e.g., 72 kW (left) and 162 kW (right) power levels. Various types of AC/DC connectors and cables allow for comfortable handling. Third-party product integration and numerous safety options are additional features.

Environmental Conditions

Front-panel-mounted air filter (AirFilter), recommended for use in dusty environments.

Important Features of the G5.CT Series

Technology

- Technologically advanced, fast switching, compact 19-inch DC electronic loads
- High control dynamics in the 100...200 μ s range – even at higher power levels up to 2000+ kW
- Exceptional accuracy and an additional high-resolution measurement range
- Wide current-voltage range with an auto-ranging factor 3
- CV, CC, CP, CR, and Ri-Sim control modes
- Regenerative and highly efficient, resulting in significant reduction of energy consumption and heat dissipation

System Control and Options

- Operating software, extended analysis, parameterization options, and calibration
- Powerful application programming interfaces (API)

System Capability

- Modular and easy scalable systems
- Parallel, series, and mixed operation with a digital high-speed bus
- Simple multi-unit configuration with the operating software
- Easy rack mounting
- Optional safety features such as 2-channel safety interface and insulation monitoring
- Turn-key cabinet solutions or project-specific system integration according to customer specification

This product is developed, produced and tested according to ISO 9001 by REGATRON.

For detailed technical information, contact your local sales partner.



Schulz-Electronic
Professional Power Supplies

Schulz-Electronic GmbH
Dr.-Rudolf-Eberle-Straße 2
D-76534 Baden-Baden
Fon + 49.7223.9636.0
Fax + 49.7223.9636.90
vertrieb@schulz-electronic.de
www.schulz-electronic.de

All product specifications and information herein are provisional and subject to change without notice.

Filename: PD_G5.CT_EN_221108

Class: Public

REGATRON DC & AC Power Supplies: Modular · Precisely Engineered · Technologically Advanced

NEW

Low Voltage / High Current Models

